

# DURABILITY OF CERAMIC MATRIX COMPOSITES IN COMBUSTION ENVIRONMENTS

Raymond C. Robinson<sup>1</sup> and James L. Smialek<sup>2</sup>

<sup>1</sup>Dynacs Engineering Company, Brookpark, OH, 44142  
<sup>2</sup>NASA Glenn Research Center, Cleveland, OH, 44135

Si-based ceramic matrix composites (CMCs) continue to draw attention as materials for high temperature components in aircraft turbine engines. To date, no burner rig recession data has been published for SiC-based composites. The purpose here is to report SiC recession of CMCs compared to that reported previously for monolithic materials.

## Background

SiO<sub>2</sub> scale volatility and the resulting recession of SiC has been previously identified for CVD, as well as sintered, SiC and Si<sub>3</sub>N<sub>4</sub> materials [1-2]. Linear weight loss and surface recession of SiC was observed as a result of SiO<sub>2</sub> volatility for both fuel-lean and fuel-rich gas mixtures. A strong Arrhenius temperature dependence exists, and parametric studies using multiple linear regression were used to develop recession relationships as a function of  $e^{-Q/RT} \cdot P^X \cdot V^Y$  for both lean and rich combustion conditions. Recession of 0.2-2.0  $\mu\text{m/hr}$  is predicted for typical combustion conditions at 1200-1400°C, with a somewhat higher absolute recession rate and activation energy for rich combustion versus lean.

## Experimental

NASA GRC's high pressure burner rig (HPBR) was used to expose both commercially available SiC/SiC composites, as well as those developed under NASA's Enabling Propulsion Materials (EPM) program, to realistic gas turbine combustion conditions. Samples (3"x0.5"x0.125") were exposed to both fuel-lean (10%O<sub>2</sub>-8%H<sub>2</sub>O-7%CO<sub>2</sub>-bal.%N<sub>2</sub> @  $\phi=0.5$ ) and fuel-rich (6%H<sub>2</sub>-12%H<sub>2</sub>O-12%CO-5%CO<sub>2</sub>-bal.%N<sub>2</sub> @  $\phi=1.5$ ) jet fuel gas mixtures. The primary test parameters included a pressure of 6 atm., temperatures of 1100°-1300°C, and resulting gas velocities of 16-24 m/s. Exposures ranged between 50-250 hrs.

## Results

**Fuel-Lean mixtures** Weight change was plotted as a function of time for a series of test temperatures for both AlliedSignal Composites, Inc. (ACI) chemical vapor infiltrated and EPM melt infiltrated SiC/SiC composite materials. As with the monolithic SiC materials, linear weight loss was observed as shown in Figure 1, and the resulting loss rates also exhibited an Arrhenius temperature dependence. Here, no differences between the two materials were noted, and a single equation was developed for CMC material loss:

$$K_1 (\mu\text{m/hr}) = 2.6036 \times 10^5 [e^{-188\text{kJ/mol} \cdot RT}] \quad (1)$$

where Equation 1 predicts surface recession ( $\mu\text{m}$ ) converted from weight change ( $\text{mg/cm}^2$ ) using the density of SiC.

**Fuel-Rich mixtures** Rich-burn tests were also conducted on BF Goodrich and ACI materials over the test conditions. Once again, linear weight loss and an Arrhenius temperature dependence were noted. Equations were developed for CMC material loss:

$$K_1 (\mu\text{m/hr}) = 6.296 \times 10^6 [e^{-230\text{kJ/mol} \cdot RT}] \quad (2)$$

$$K_1 (\mu\text{m/hr}) = 4.629 \times 10^6 [e^{-219\text{kJ/mol} \cdot RT}] \quad (3)$$

where Equations 2 and 3 predict surface recession for the BFG and ACI materials, respectively. Figure 2 shows the

Arrhenius plots compared to the monolithic CVD SiC results. The slope of each curve is used to determine the activation energy ( $Q$ ) of the thermally activated process, also given in Figure 2.

A summary of all results is given in Table I. In both fuel-rich and fuel-lean cases, the activation energy ( $Q$ ) is higher for the CMCs when compared to the monolithic material, while rich-burn is consistently higher than lean-burn for a given material. Although there is slight differences in the absolute recession, the temperature dependency of both the BFG ( $Q=230 \text{ kJ/mol} \cdot \text{K}$ ) and DuPont ( $Q=219 \text{ kJ/mol} \cdot \text{K}$ ) CMCs were similar. Using Equations 1-3, long-term recession has been predicted under standard (6 atm, 16-24 m/s) conditions and compared to monolithic CVD SiC. For example at 1300°C, rich-burn exposure could typically predict nearly 10 mils of recession in only 1000 hrs, while lean-burn, although still very significant, would be nearly half that of rich-burn.

These results clearly indicate the concern for SiC recession extends to composite structures as well. Microstructure and protective coating concepts are secondary topics also planned for discussion.

## References

- [1] R.C. Robinson and J.S. Smialek, "SiC Recession due to SiO<sub>2</sub> Scale Volatility Under Combustor Conditions, Part I: Experimental Results and Empirical Model," J. Am. Ceram. Soc., in press, 1999.
- [2] E.J. Opila, et. al., "SiC Recession Due to SiO<sub>2</sub> Scale Volatility Under Combustor Conditions. Part II: Thermodynamics and Gaseous Diffusion Model," J. Am. Ceram. Soc., in press 1999.

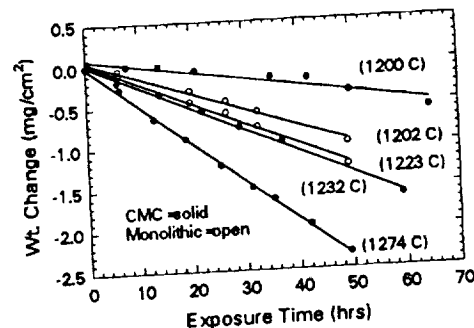


Figure 1. Linear weight loss of SiC-based materials under standard fuel-lean conditions (P=6 atm.).

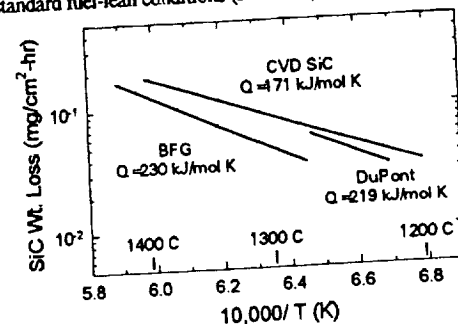


Figure 2. SiC/SiC CMC weight loss ( $\text{kg/m}^2\text{-hr}$ ) under standard rich-burn conditions compared to monolithic SiC.

Table I. Results for rich and lean (6 atm, 1300°C, 1000 hr)

	RICH-BURN		LEAN-BURN	
	CVD	CMC	CVD	CMC
Q (kJ/mol K)	171	219-230	111	188
Recession ( $\mu\text{m}$ )	259	143-245	110	155

## TECHNICAL PUBLICATION APPROVAL FORM

TECHNICAL PUBLICATION APPROVAL FORM					
AUTHOR(S) (Continue in Remarks.)	ORG. CODE	AFFILIATION (See page 2.)	PHONE NO.	MAIL STOP	ROOM NO.
R.C. ROBINSON	5160	C	5547	24-1	104
J-L. SMIALEK	5160	<del>E</del> GRC	5500	106-1	103

Funding Division No. 2200 Current Funded Task No. YDR 1707 Funding RTOP No. 537-04-22  
Lewis Contract Monitor \_\_\_\_\_ Org. Code \_\_\_\_\_ Phone No. \_\_\_\_\_ Mail Stop \_\_\_\_\_ Room No. \_\_\_\_\_  
Contract or Grant No. \_\_\_\_\_ Other Report No. \_\_\_\_\_ Non-NASA Funding (Specify) \_\_\_\_\_  
Contract Organization and Complete Address \_\_\_\_\_

<b>① REPORT TITLE AND SUBTITLE</b> <i>DURABILITY OF CERAMIC MATRIX COMPOSITES IN COMBUSTION ENVIRONMENTS</i>		<b>② REPORT TYPE</b> (See Page 2 and NPG 2200.2A) <input type="checkbox"/> TP <input checked="" type="checkbox"/> Presentation <input type="checkbox"/> TM <input type="checkbox"/> TM or CR <input type="checkbox"/> CR <input type="checkbox"/> No TM or CR (including oral) <input type="checkbox"/> CP <input checked="" type="checkbox"/> Journal article/book <input type="checkbox"/> SP <input type="checkbox"/> Informal STI (Write URL in Remarks.)		<b>③ WORK REQUESTED</b> <input type="checkbox"/> Edit <input type="checkbox"/> Process <input checked="" type="checkbox"/> Credit only Attach complete report.	
<b>④ MEETING TITLE, LOCATION, AND DATE</b> JOURNAL TITLE <i>196th Meeting of the Electrochemical Society, Hawaii, OCT 17-22, 1999</i>		<b>⑤ DISTRIBUTION</b> <input checked="" type="checkbox"/> Standard <input type="checkbox"/> Nonstandard <input type="checkbox"/> Local <b>SECURITY CLASSIFICATION</b> <input checked="" type="checkbox"/> Unclassified <input type="checkbox"/> Confidential <input type="checkbox"/> Secret Patent Notice given to authors: Initials _____ Date ____/____/____			
PUBLISHER/SPONSOR		<b>⑥ DISTRIBUTION AVAILABILITY CATEGORY</b> (See NPG 2200.2A) No Restriction      Export Controlled <input checked="" type="checkbox"/> Publicly available <input type="checkbox"/> ITAR - USML Category No. _____ <input type="checkbox"/> Publicly available SBIR (attach letter) <b>Confidential Commercial</b> <input type="checkbox"/> EAR - ECCN _____ <input type="checkbox"/> Trade secret <input type="checkbox"/> Patent <input type="checkbox"/> License Agreement <input type="checkbox"/> Space Act Agreement (SAA) No. _____ <input type="checkbox"/> LEAD <input type="checkbox"/> Copyrighted <input type="checkbox"/> SBIR Restricted until ____/____/____ <b>Availability for restricted document</b> <input type="checkbox"/> U.S. Government Agencies and U.S. Government Agency Contractors Only <input type="checkbox"/> NASA Contractors and U.S. Government Agencies Only <input type="checkbox"/> U.S. Government Agencies Only <input type="checkbox"/> NASA Personnel and NASA Contractors Only <input type="checkbox"/> NASA Personnel <input type="checkbox"/> Available Only with Approval of Issuing Office (Program Office or NASA Center) Limited until ____/____/____ (if applicable)			
<b>⑦ TRADE NAMES USED?</b> <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		<b>⑧ SUBJECT CATEGORY(IES)</b>			
<b>⑨ SUBJECT TERMS</b> (From NASA Thesaurus) <i>SIC, OXIDATION, COMPOSITES</i>					
Approvals must be complete before your report can be processed.					
<b>⑩ MANAGEMENT REVIEWS AND APPROVALS</b> Initial      Date Author/Technical Monitor name (printed) <i>R.C. ROBINSON</i> <i>R.R.</i> <i>5-14-99</i> Branch Chief/Office Head name (printed) <i>L.A. GREENBAUER-Seng</i> <i>LAGS</i> <i>5-14-99</i> Division Chief name (printed) <i>H.P. GRAY</i> <i>HRC</i> <i>5/20/99</i> Editing waived? <input checked="" type="checkbox"/> Yes <input type="checkbox"/> No <b>TECHNICAL REVIEW COMMITTEE</b> (Required for standard distribution reports.) Chair or Reviewer name (printed) <i>A. MISRA</i> Checker name (printed)  Advisor name (printed)  					
<b>⑪ DISTRIBUTION REVIEWS AND APPROVALS</b> Author/Originator name (printed)      Signature      Date <i>R.C. ROBINSON</i> <i>R.C. Robinson</i> <i>5-14-99</i> Branch Chief name (printed) <i>L.A. GREENBAUER-Seng</i> <i>L.A. Greenbauer-Seng</i> <i>5-17-99</i> Division Chief name (printed) <i>H.P. GRAY</i> <i>H.P. Gray</i> <i>5/20/99</i> Intellectual Property Officer name (printed) (if required) <i>BOOKER T. DAWKINS</i> <i>Booker T. Dawkins</i> <i>5-14-99</i> Center Export Administrator name (printed) <i>L. VITERA</i> <i>L. Vitera</i> <i>5/20/99</i>					

REMARKS

E 11823

Selection of the correct series in which a document is published should be based on the content of an author's manuscript and the needs of an identifiable readership. The preliminary determination is made by the author in conjunction with the NASA Lead Center or Center Publications Office. It is subject to the approval of the NASA Headquarters Office or Center review process.

## NASA STI REPORT TYPES

**Technical Publications (TP's)** record results of completed research or of a significant phase of research from NASA programs. They usually include extensive data or theoretical analysis, but they may be compilations of significant scientific and technical data or information deemed to be of continuing reference value. TP's are NASA's counterpart to peer-reviewed formal professional papers, but their length and extent of graphic presentations are not as limited. TP's include bibliographies with abstracts and/or extensive annotation, technical handbooks, critical tables, extensive use data compilations, design standards, textbooks and manuals, critical reviews of scientific or technical literature, comprehensive reports of significant contributions to scientific and technical knowledge, or a critical evaluation of selected, previously published research. (TP's replace TP's, RP's, low TM's, and some low CR's. TP's always receive standard distribution.)

**Technical Memorandums (TM's)** present scientific and technical findings that are preliminary or of specialized interest (e.g., quick release reports, working papers, and bibliographies that contain minimal annotation). TM's do not contain extensive analysis. TM's include preliminary results, working papers, preprints of professional meeting papers, preliminary proceedings of professional meetings, civil servant work-related theses, bibliographies with minimal annotations, preprints or reprints of professional journal and technical magazine articles, computer program documentation, limited use data compilations, reports to other agencies, security classified reports, and non-NASA sponsored research results. (TM's replace high TM's, and abstract-only high CP's printed before the meeting or conference. They receive standard or nonstandard distribution.)

**Contractor Reports (CR's)** record scientific and technical findings by NASA-sponsored contractors and grantees. A final report or nonrequired report authored by a contractor or grantee may be selected by the NASA monitoring office for publication as a NASA CP, SP, or TP in lieu of being published as a CR. (CR's replace most low and all high CR's. They receive standard or nonstandard distribution.)

**Conference Publications (CP's)** are the collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA. Individual papers may be preprinted and distributed to attendees at conferences even though subsequent printing and standard distribution as a CP is planned. (CP's replace low and high CP's. They receive standard distribution.)

**Special Publications (SP's)** record scientific, technical, or historical information from NASA programs, projects, and missions. They are often concerned with subjects having substantial public interest. SP's include scientific summaries of mission results, atlases of scientific imagery, selected outlook studies, comprehensive program descriptions, retrospective assessments, contractor or grantee results and findings of interest to a wide public audience, histories and chronologies, management publications (requirements, plans, theories, or techniques for managing NASA-sponsored scientific and technical work), regularly published abstracts, continuing bibliographies, indexes, publication guides, and announcement journals. (SP's receive standard or nonstandard distribution.)

**Technical Translations (TT's)** are English-language translations of non-English scientific and technical material pertinent to NASA's mission. (Copies go to the requestor and CASI only.)

**Informal STI** is scientific and technical information not intended for initial release in the NASA STI Report series. The author maintains responsibility for dissemination and preservation of the information. For informal STI that is to be released outside of NASA, a completed, signed DAA or C-22 containing the URL of the informal STI must be on file in the Publications Services Coordination Office. Mark the "Informal STI" box in the REPORT TYPE block of the C-22 and write the URL in the Remarks area at the bottom of the form. Informal STI is not disseminated to NASA CASI for archiving.

## DISTRIBUTION CATEGORIES

**For standard distribution**, copies of reports are distributed to NASA CASI and NASA Center libraries, as well as to domestic and international organizations, corporations, and universities that are registered subscribers to NASA to receive NASA STI publications.

**For nonstandard distribution**, copies of reports are distributed (in print or nonprint media) to NASA Center libraries and NASA CASI, as well as to other government agencies such as NTIS, the Superintendent of Documents at GPO, and Federal Depository libraries.

**Local distribution** may be made in addition to standard or nonstandard distribution. Local distribution lists are the responsibility of and are developed by a NASA Headquarters or NASA Center office. Usually the author's division distributes these from copies delivered to the author.

## RESTRICTED DISTRIBUTION TYPES

**Export Controlled**  
ITAR International Traffic in Arms Regulations  
EAR Export Administration Regulations

**Confidential Commercial**  
Trade Secret  
Copyrighted  
SBIR Small Business Innovation Research

## AFFILIATIONS

LeRC – Lewis Research Center	C – Contractor	G – Grantee	RRA – Resident Research Associate
A – Army	ICOMP – ICOMP	SFF – Summer Faculty Fellow	SI – Summer Intern
NRC/NRA – National Research Council-NASA Research Associate		O – Other (specify) _____	

For more information, see NPG 2200.2A—Guidelines for Documentation, Approval, and Dissemination of NASA Scientific and Technical Information. Available online: <http://www.sti.nasa.gov/npghome3.htm>

If you have any questions, please call the Technical Publications Manager at (216) 433-5790  
or the Publishing Services Coordination Office at (216) 433-5810 or (216) 433-5786.